

# BRAKE OUT #1299

Aerosol Non-chlorinated Brake Parts Cleaner




## Features:

- Dries and cleans fast
- Leaves no residue
- Removes brake fluid, grease and oil
- Hexane free
- Helps eliminate squeal and chatter
- Degreases instantly with high flushing action
- Non-chlorinated

## Description:

BRAKE OUT is an economical, residue-free, super-fast-drying, heavy-duty formula that removes brake fluid, grease, oil, dust, operating erosion and other contaminants from brake parts, pads, discs, linings and drums. It features an up/down, flush-action valve that allows spraying in an upright or inverted position. This product helps stop disc brake squeal, lengthens pad life and improves brake performance.

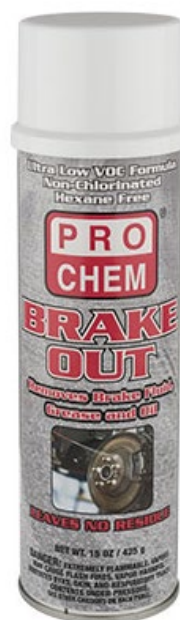

## Applications:

- Brake Lining
- Springs and Gears
- Engine Parts
- Calipers
- Drums
- Shoes/Disc Pads
- Rotors
- Generators and Motors
- Cylinders
- Tools
- Bearings
- Starters

## Product Characteristics:

Physical State:	Liquid
Color:	Not available
Form:	Spray Aerosol
Odor:	No data available
Flash Point:	-14.6°C
Vapor Pressure:	4,826 - 6,205 hPa (20°C)
Explosive Limit – lower (%):	Estimated 13.2% (V)
Explosive Limit – upper (%):	Estimated 2.6% (V)
Boiling Point:	Estimated 46.17°C
Oxidizing Properties:	No data available
Vapor Pressure:	4,826 - 6,205 hPa (20°C)
Storage:	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
<b>Transport Information:</b>	
UN Number:	UN1950
Proper Shipping Name:	Aerosols, flammable
Class:	2.1
Packing Group:	II

## Directions:

Read entire label before using this product. This product is Extremely Flammable. Use of this product could cause a flash fire, which may result in injury if misused. DO NOT spray on hot metal surfaces. Use product in well-ventilated area. PROTECT all rubber brake parts and painted surfaces from product and overspray. DO NOT apply while equipment is energized. Avoid breathing any dust or vapors that may become airborne. Holding can upright, spray brake parts liberally and allow to run off. Air or wipe dry with clean soft cloth. Repeat as necessary. To expel entire contents, hold can at a 45° angle and rotate until all contents have been discharged.

*\*Not for sale in CA.*

## Pictograms:



## Signal Word:

DANGER

## Personal Protective Equipment Required:



## DOT Placard:



## VOC Compliant:

Yes.