


DURA-COAT #2124

Latex Floor Coating



Features:

- Polyurethane-modified, acrylic latex floor paint
- Adhesion and abrasion resistance
- Interior and exterior paint
- Low odor and low VOC
- Soap and water cleanup
- Can walk on floors 24 hours after applying

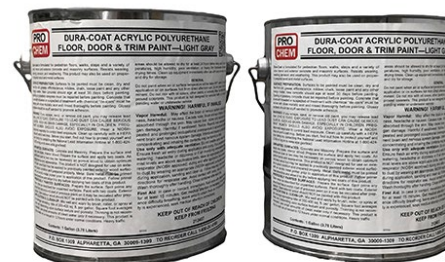

Description:

DURA-COAT is a penetrating surface sealer designed for treating most interior/exterior wood, primed metal and concrete. Ultra-tough, it penetrates wood providing resistance to wear, warping, shrinking and checking. DURA-COAT is ideal as a sealer for bare concrete floors to prevent concrete dusting.

New concrete should age at least 30 days before painting. Concrete that is smooth troweled or suspected of treatment with chemical "de-icers" must be etched with diluted muriatic acid and rinsed thoroughly before painting. Glossy surfaces should be scruff sanded to promote adhesion. This product should not be used on bare exterior wood but can be used on bare interior wood.

Applications:

- Brick
- Stone
- Metal
- Masonry
- Interior Floors
- Concrete
- Wood
- Exterior Floors
- Walkways

Product Characteristics:

Appearance:	Dark gray liquid
Odor:	Mild
Vapor Pressure at 20°C (68°F):	23 hPa (17 mm Hg)
Vapor Density:	Heavier than air
Gloss Rating:	35-45%
Solubility:	Fully miscible
Solid Content:	39.8%
Flash Point:	161°F closed cup
Viscosity:	78-80 K.U.
Boiling Point/Range:	> 100°C (> 212°F)
Auto Ignition Temp:	Product is not self-igniting
pH:	9.2
Organic Solvents:	8.4%
Water:	55.0%
VOC Content:	8.4% <250 g/l
Storage:	Store locked up. Store in a well-ventilated place. Keep cool.
Application Temperature:	Minimal 50°F - Maximum 90°F
Transport Information:	
UN Number:	UN1263
Proper Shipping Name:	Paint
Class:	Not regulated
Packing Group:	Not regulated

DOT Placard:
Not regulated.

VOC Compliant:
Yes

Directions:

APPLICATION & CLEAN-UP: Mix well and apply by brush, roller, or spray at an average spreading rate of 350-400 sq. ft. per gallon. Square foot averages may vary depending upon surface texture and porosity. Thinning is not recommended; use small amounts of clean water only if necessary. This product is dry to walk on or recoat in 12 hours under normal conditions. Heavy traffic areas should be allowed to dry for at least 24 hours before being used. Cool temperatures, high humidity, poor ventilation, or heavy film thicknesses will extend drying times. Clean up equipment immediately after use with soap and water, rinse and dry for storage.

Do not paint when air or surface temperature will be below 50°F. within 24 hours of application or on surfaces hot from direct afternoon sun.

Do not paint if rain is imminent. Do not mix with oil colors, other paints or solvents. DURA-COAT is not designed for vehicular traffic or for areas of ponding water or underwater services.

COVERAGE: 400 sq. ft./gal. (Depending upon the porosity of the substrate).

Pictograms:



Signal Word:
DANGER

Personal Protective Equipment Required:

