

GL 50 #1776

Aerosol High-Temperature Dry Graphite Lubricant




Features:

- Has a wide temperature range of -100°F to 800°F
- Does not attract dust
- Designed to eliminate friction and withstand extreme pressure
- Penetrates deeply, dries quickly and sheds moisture

Description:

GL 50 is a high-grade, dry-film graphite lubricant that protects and lubricates moving parts on equipment. It protects against rust and corrosion as it eliminates squeaking from tools, hardware and accessories. GL 50 hardens to a tough, long-lasting, tack-free film.

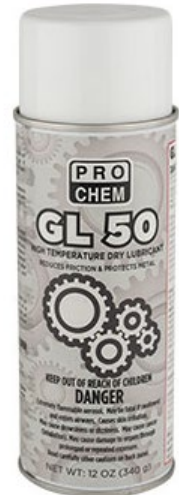

Applications:

- Wheels and Castors
- Hinges
- Conveyors
- Nuts and Bolts
- Gears
- Tools
- Hardware
- Accessories
- Rollers
- Shafts
- Industrial Tools
- Drawer Glides

For Use By:

- Contractors
- Bus Garages
- Fleet Operations
- Housing Authorities
- Industrial Plants
- Municipalities
- Utility Companies
- Railroads
- Warehouses

Product Characteristics:

Appearance:	Gray liquid
Odor:	Hydrocarbon
Vapor Pressure:	≈ 4.4 atm @ 70°F
Viscosity (kinematic):	<20 cSt
Solubility:	Negligible
Flash Point:	<156°F (estimated)
VOC Content:	<85%
Specific Gravity:	>1.0
Storage:	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Transport Information:	
This product may be eligible to be shipped as a Limited Quantity or Consumer Commodity ORM-D utilizing the exception found at 49 CFR 173.306.	

Directions:

Shake well before using. Hold nozzle 6 - 8 inches from surface requiring lubrication. Generously apply to surface requiring lubrication. Reapply as necessary to maintain lubrication level.

Note: Clean nozzle after each use by inverting can and spraying.

Pictograms:



Signal Word:

DANGER

Personal Protective Equipment Required:



DOT Placard:

