

# TRED SAFE #2117

## Acrylic Latex Antislip Coating



### Features:

- Low odor
- Low VOC
- Easily maintained with soap and water
- Stock silver gray; also available in black, handicap blue, yellow, red, green, walnut brown, bombay, navy gray and dark gray
- Textured, flat finish
- Lead, chromate and mercury free



### Description:

TRED SAFE is a tough, abrasive, anti-slip, one-part coating for a variety of interior or exterior applications. It has a textured, flat finish that will substantially reduce the threat of slippage, resulting in fewer injuries and major cost savings. This product is not for use in areas where it will be underwater. It is also not for use on garage floors or other areas of wheeled vehicle traffic. Do not mix with oil colors, other paint products or solvents.

### Applications:

- Ramps
- Locker Room
- Concrete
- Boat Docks & Decks
- Steps
- Walkways
- Wood
- Metal Surfaces

### Product Characteristics:

|                            |   |
|----------------------------|---|
| Appearance:                | Liquid, silver gray   |
| Odor:                      | Mild  |
| Boiling Point:             | 158°C (>316°F)  |
| Vapor Pressure:            | 23 hPa (17 mm Hg)   |
| Vapor Density:             | Heavier than air  |
| Water Solubility:          | Fully miscible  |
| Vapor Density:             | Heavier than air  |
| Flash Point:               | 70°C (158°F)  |
| Melting Point:             | Undetermined  |
| VOC                        | 5.4% < 250 g/l  |
| Storage:                   | Keep container dry and tightly closed and sealed until ready for use. |
| Storage Temp:              | 35°F-120°F  |
| Coverage:                  | 100-125 sq. ft/gal  |
| Recommended Film Per Coat: | Wet: 12.8-16.0 mils<br>Dry: 5.0-8.0 mils                              |
| Application Temperature:   | Min. 50°F<br>Max. 90°F  |
| Dry Time:                  | 2-4 hours tack-free; 18-24 hours to recoat; hard in 7-14 days         |

### Transport Information:

|                       |               |
|-----------------------|---------------|
| UN Number:            | Not regulated |
| Proper Shipping Name: | Not regulated |
| Class:                | Not regulated |
| Packing Group:        | Not regulated |

### DOT Placard:

Not regulated.

### Pictograms:



### Signal Word:



DANGER.

### Personal Protective Equipment Required:



### Directions:

All surfaces must be clean and free of dust, dirt, grease, mildew, soap residue, loose paint, glue and any other foreign matter. For best results, the cause of any previous paint failure should be corrected before repainting. New masonry surfaces should age 30 days before being coated. Concrete that is new, smooth troweled or suspected of being treated with chemical deicers needs to be etched with a 10% solution of muriatic acid and allowed to thoroughly dry before painting. Glossy surfaces should be dulled with fine sandpaper to ensure proper adhesion. Unpainted metal surfaces must be primed with metal primer before coating. Previously painted surfaces in poor condition require the removal of old paint before coating. Apply with brush, roller or trowel. Floors are dry to walk on after 24 hours under good drying conditions.

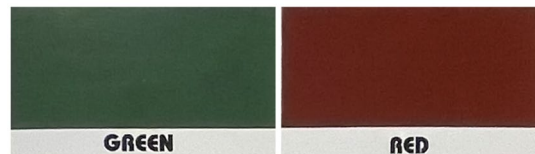

\*Actual colors may vary. Colors may appear different on screen.