


# ANTI-SEIZE II #1155101

## Aerosol Copper-Based Anti-Seize



### Features:

- Copper-Moly combination prevents seizing
- Contains No chlorinated solvents (No 1,1,1-Trichloroethane)
- Improves ground conductivity
- Synthetic oil-based formula
- Temperature Range -60°F to +1800°F
- Formulated with Moly for extreme pressure resistance
- 50 State VOC Compliant
- Made in the USA

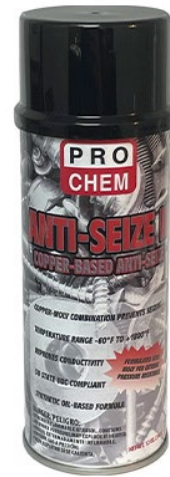

### Description:

ANTI-SEIZE II is a copper-based anti-seize lubricant formulated to withstand high temperatures and extreme pressures. Continues ground conductivity better than ordinary lubricants. Seals out moisture, gases and corrosive fluids from threaded connections. Copper-Moly combo prevents seizing, galling and premature wear. Contains rust and corrosion inhibitors to assure long life of connectors.

### Applications:

- All Threaded Surfaces
- Flanges
- Nuts
- Bolts
- Screws
- Keyways & Spark Plugs
- Thread Tubing
- Air Cylinder Assemblies
- Pneumatic Cylinder Shafts
- Pipes
- Gears
- Hoists
- Pumps
- O-Rings
- Plugs
- Guides
- Studs
- Drives
- Rollers
- Gaskets
- Bushings
- Bearings
- Conveyors
- Regulators
- Fuel Injectors
- Air Slides
- Axle Shafts
- Torque Rod Pins & Tubes
- Pre-Combustion Chambers
- Burner Assemblies
- Transmission Boxes
- Hand & Motor Operated Valves
- Control Chests & Headers
- Man & Handhold & Inspection Doors
- Manifold & Stud Assemblies
- Turbo-Charger Fittings
- Turbines
- Winches
- Furnaces
- Cylinder Head
- Valve Stems
- Compressors
- Electric Motors
- Valve Cages
- Chains

### Product Characteristics:

Appearance:	Copper spray
Odor:	Solvent odor
Viscosity:	Not determined
Evaporation Rate:	Not determined
Vapor Pressure (mm Hg):	Not determined
Solubility(ies):	Not determined
Relative Density (H2O=1):	0.87 - 0.89 @ 77°F (25°C)
Flame Extension:	18"
Flash Point:	Not determined
pH:	Not applicable
Phosphates:	None.
Wetting Ability:	N/A
Storage Stability:	1 Year+
Cold Stability:	0°F
Propellant:	Hydrocarbon
Storage:	Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store in a well-ventilated place.
<b>Transport Information:</b>	
UN Number:	UN1950
Proper Shipping Name:	Aerosols, Ltd. Qty.
Class:	2.1
Packing Group:	Not applicable

### Directions:

Shake can well before using. Clean surface thoroughly. Apply only enough to form solid film over contact surfaces of threads, gaskets, bushings, etc. Assemble and wipe off excess.

### Pictograms:



### Signal Word:

DANGER.

### Personal Protective Equipment Required:



### DOT Placard:

Not available.

### VOC Compliance:

50 State Compliant